



DiMX - Casambi enabled DMX controller

Controlled by Casambi App



Description

DiMX is Casambi enabled wireless controller of up to 8 channels DMX-512 dimmer.
DiMX enables the connection of DMX-512 Master controller to Casambi network.
DiMX can be also used to be connected directly to DMX controlled fixtures and devices such as Lumemetix CMT and ALM, each device will be controlled individually through the Casambi App
DiMX supports: RGB/RGBW/Tuneable White/ HSL

App

DiMX can be controlled and configured by Casambi free App.
Multiple DiMX devices can be used in the same area/network

Installation

DiMX can be installed remotely or integrated in a fixtures.
Dimx work with 12-36VDC class 2 power supply unit.


Technical Information

Input:
Power 12-36VDC 35mA
Output
DMX 512 signal D+/D-/Ground
Wire Type 14-22AWG
Operating Temp -20...+45°C
Radio Transceiver 2.401-2.483Ghz

Size (mm) 61x29x13
Size (in) 2.4x1.14x0.5
Weight 20gr

Control Device iOS device - iPod/iPhone/iPad
Android 4.4 or later devices.

Protocols RGB/W & HSL
Installation Remote or integrated
Certificates CE, UL Pending

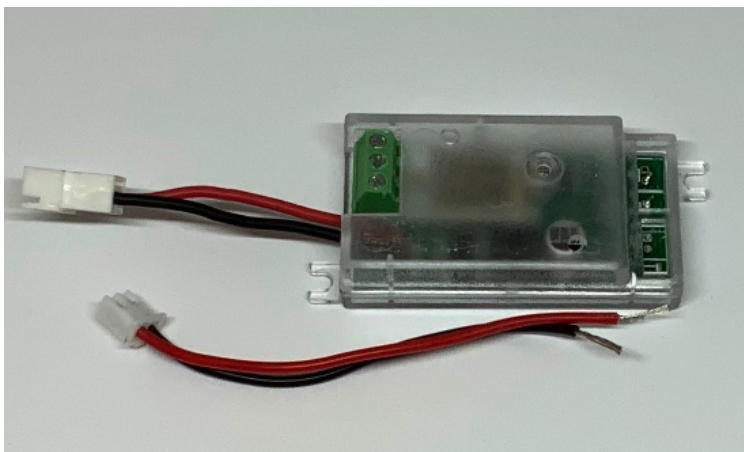

NOTES: DiMX is available with out plastic case - on request.
Cable connector for input included

We reserve the right to change specifications without prior notification.